

## INSTALLATION INSTRUCTIONS

### GES 66 Adapter

FOR USE WITH GLOBAL eco SYSTEM ONLY

**UPON RECEIPT OF MERCHANDISE:** Thoroughly inspect for any freight damage, which should be brought to the attention of the carrier. Compare the catalog description listed with the track or accessory label on the merchandise to be sure you have received the correct merchandise.

#### IMPORTANT SAFETY INFORMATION

##### Read all instructions before installation

1. The GLOBAL eco system is intended for use with GLOBAL eco components and fixtures marked for use with the GLOBAL eco system. To reduce the risk of fire and electric shock, do not use other components as part of this system.
2. Track installation is only to be performed by a certified electrician in accordance with the National Electrical Code and all local codes and standards.
3. The GLOBAL eco GES track system is designed to be supplied by a single 120 volt branch circuit with a maximum capacity of 20 amps. The two circuit GLOBAL eco GET system is to be supplied by a balanced 120/240 volt, three-wire branch circuit with a maximum capacity of 40 amps.
4. Do not use this track with a power supply cord or convenience receptacle adapter.
5. Do not install any fixtures closer than six inches from combustible materials.
6. Do not install the track in damp or wet locations.
7. Do not install the track with electric power connected. Similarly, disconnect electricity when installing or removing fixtures or components or changing the configuration of the track.
8. Do not attach anything other than UL listed lighting fixtures marked for use with Nordic Aluminium GLOBAL eco system only to the track.

#### IMPORTANT

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE WHEN ADDING FIXTURES OR CHANGING THE TRACK CONFIGURATION

**Note:** Turn off electrical power to the track system.

**WARNING:** Do not remove or install a lamp with the fixture energized.

#### Select Circuit Position:

The fixture adapter can be used on both GLOBAL eco GES (one circuit) and GET (two circuit) track systems. An adjustable contact on the fixture adapter allows you to select the circuit position.

1. For one-circuit installation, no adjustment is required. Contact is in the down position. (Figure 1)

2. For two-circuit installation, move contact to the up position. (Figure 1)
  - If necessary to adjust the contact, use a narrow blade screw driver to lift or lower the contact.

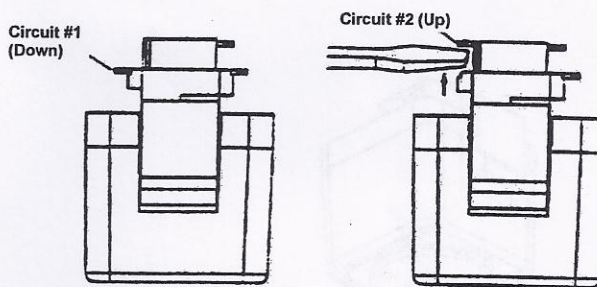


Figure 1

#### Fixture installation (as shown in Figure 2):

**CAUTION:** Fixtures supplied with the GES66 adapter can be used only with GLOBAL eco trac. Attempted use on any other track could cause fire and electrical hazard.

1. Hold the adapter below the track with your thumb on the locking tab. Make sure the locking tab is positioned directly below the polarity line. Push adapter into track.
2. Rotate adapter 90° clockwise.
3. Make sure the polarity lines match between the track and the fixture adapter.
4. Release the locking tab and the fixture should snap into position.

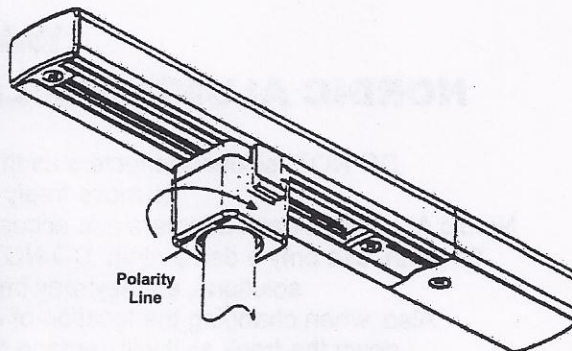


Figure 2

## NORDIC ALUMINIUM