

GLOBAL *eco*

LIGHTING TRACK SYSTEMS



1 & 2 CIRCUIT



- High quality, UL listed 1 or 2 circuit lighting track systems
- Low profile, easy & flexible installation
- Open architecture -- ready for any of your fixtures now!



GLOBAL trac lighting track is engineered to be a durable, dependable, and simple-to-install lighting solution. The track's extruded aluminum construction and continuously crimped conductor ensure mechanical strength and electrical reliability. The integral suspension rail and predrilled mounting holes of the track simplify the installation process.

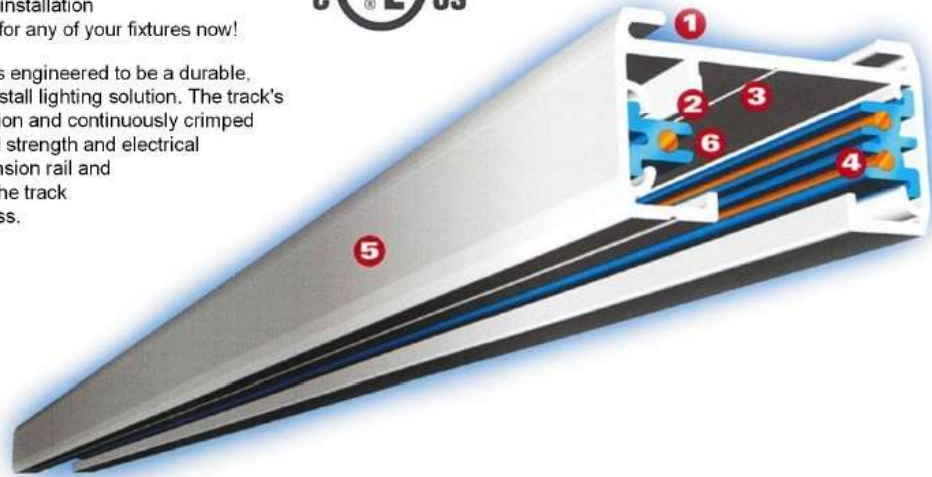

1-circuit track (GES)

Ordering Information

Lengths* - 4', 8', 12'

GES designates 1 circuit;


Color Codes - White (-3), Black (-2), Natural Aluminum (-1)

Nominal Lgth*	Actual Lgth*	One Circuit	Two Circuit
4-feet	44-inches	GES 204-(color)	GET 304-(color)
8-feet	92-inches	GES 208-(color)	GET 308-(color)
12-feet	140-inches	GES 212-(color)	GET 312-(color)


Example: 1-circuit, 8-foot track section in black: GES 208-2

* Actual lengths differ from nominal lengths to accommodate modularity in grid applications.


- 1 Suspension Hardware Rail** - provides fastening point for suspension hardware, also serves as an attachment point for the unique, load-bearing metal backplate featured on eco feeds and connectors, ensuring a secure connection.
- 2 Milled Grounding Bar** - provides continuous ground contact for fixtures anywhere along the track run.
- 3 Alignment Groove** - provides easy centering for screws.
- 4 Bus Bar Installation** - conductor and insulation assembly is crimped continuously into place along the track profile, and is guaranteed not to slip for the life of the product, regardless of whether or not the track has been field cut.
- 5 Extruded Channel** - constructed of strong, extruded aluminum. Impervious to corrosion.
- 6 Predrilled Mounting Holes** - for installation convenience. Tracks ship from the factory with predrilled mounting holes spaced per UL and NEC guidelines.

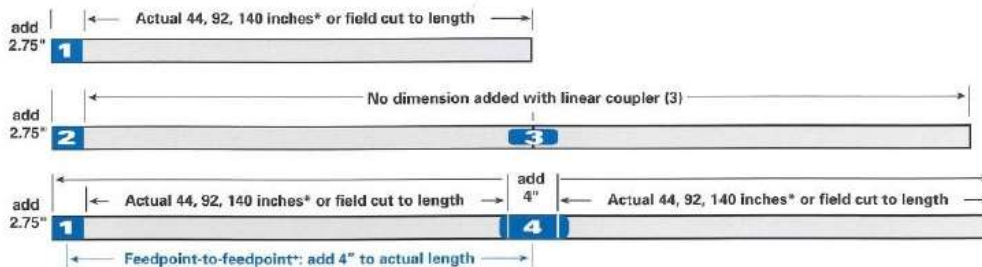


GES 11 (-2,-3) 1-Circuit GES 13 (-2,-3) 1-Circuit GES 21 (-2,-3) 1-Circuit GES 14 (-2,-3) 1-Circuit

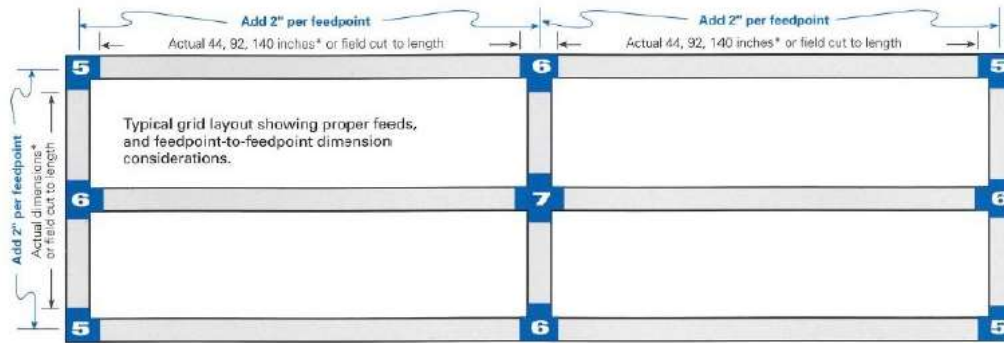

Feedable L-Connector
Right/Left configurable.
GES 34 (-2,-3) 1-Circuit



Feedable T-Connector
Right/Left configurable. GES 40 (-2,-3) 1-Circuit



Feedable X-Connector
GES 38 (-2,-3) 1-Circuit



patented

Feed Connectors with patented backplate suspension contact
A unique backplate feature provides additional strength by mechanically integrating track and connectors into one continuous system.

- 1** Heavy-gauge steel backplate provides independent mechanical support.
- 2** Copper conductor never bears mechanical load. Held in place by continuous crimp insulator to ensure reliable electric contact.
- 3** Durable GE Lexan® components. Soft finish reduces fingerprints.



Live End Feed



Conduit End Feed



Linear Coupler



Live Middle Feed